

In order to prevent image retention (aka: image sticking, or image burn-in), please use a dynamically changing screensaver or turn off the display when not in use.
Note: Image retention is not covered by your warranty.

No touch driver installation needed
Aucune installation de pilote nécessaire tactile
No hay instalaciones de controlador toque necesario
Kein Touch-Treiber-Installationen notwendig
Nessun driver installazioni tocco necessario
Не прикасаться установок драйвера необходимы
タッチドライバをインストール不要
不需安装触摸驱动程序
不需安装触控驱动程序
필요 없음 터치 드라이버 설치 없음



Quick Installation Guide

Open Frame Touchscreens

Revision E
P/N E107071

Learn more about Elo at EloTouch.com

America Tel +1 408 597 8000 EloSales.NA@elotouch.com	Europe(EMEA) Tel +32 16 930 136 EMEA.Sales@elotouch.com	Asia-Pacific Tel +86 (21) 3329 1385 EloAsia@elotouch.com
---	--	---

The information in this document is subject to change without notice. Elo Touch Solutions, Inc. and its Affiliates (collectively “Elo”) makes no representations or warranties with respect to the contents herein, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. Elo reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Elo to notify any person of such revisions or changes.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Elo Touch Solutions, Inc.




Elo and the Elo logo are trademarks of Elo Touch Solutions, Inc., registered in many jurisdictions worldwide.



Go to www.elotouch.com/support to download user manual.

Go to www.elotouch.com/support to access and download safety information prior to use

Visitez www.elotouch.com/support pour accéder aux consignes de sécurité, et les télécharger, avant utilisation.

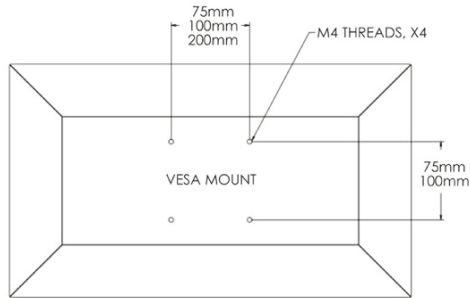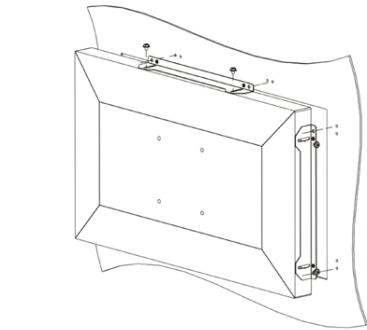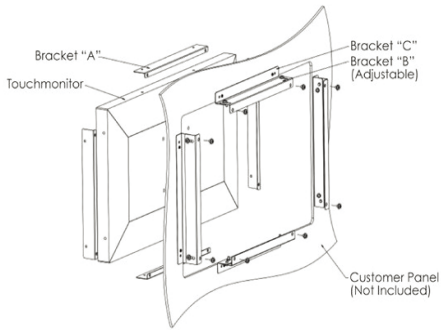

Power

Video
 HDMI **OR** VGA **OR** Display Port

Touch
 USB **OR** Serial

OSD

Flush Mount (zero bezel models)

Bracket shape and quantity varies for each model, drawing for illustration purposes only.

- For 3-bracket designs (see dimensional drawing for details):
1. Attach bracket "A" to touchscreen monitor (all four sides) with M4 screws (included).
 2. Attach bracket "C" to customer panel (all four sides).
 3. Attach bracket "B" to bracket "C" on all four sides with M4 screws (included).
 4. Adjust depth of bracket "B" so monitor is flush with customer panel.
 5. Place touchscreen monitor into customer panel opening.
 6. Secure touchscreen monitor to bracket "B" from behind with M4 screws (included).

For 2-bracket designs (12"-20" and 24" sizes), see dimensional drawing for details.

Side Mount (front bezel models)

Bracket shape varies for each model, drawing for illustration purposes only. See dimensional drawing for details.

Rear VESA Mount

A VESA-compliant mounting pattern for M4 screws is provided on the rear of the monitor. Pattern varies for each model. Drawing is for illustration purposes only. See dimensional drawing for details.

The VESA FDMI-compliant mounting is coded VESA MIS-D or MIS-E.

DC Input Rating By Model

Model	ET1093L	ET1291L ET1590L ET1594L	ET1790L	ET1990L ET1991L ET2094L ET2494L	ET2294L ET2794L	ET2295L ET2495L
DC Rating	12Vdc/1A	12Vdc/1.5A	12Vdc/2A	12Vdc/2.5Vdc	12Vdc/3 or 3.5A	12Vdc/3.5A


Cover Glass Installation

Elo Open Frame PCAP Touchscreens support protective cover glass. Cover glass must be installed with no air gap to the Touchscreen glass. Touch Thru mode must be enabled to use cover glass.

To enable Touch Thru mode:

1. Press the Menu button on the unit's tethered OSD Remote.
2. Navigate to Miscellaneous -> Touch -> Touch Thru.
3. Set to "On".
4. Add cover glass on top of touchscreen.
5. Power cycle the monitor.

If the cover glass is later removed, this feature should be set to "Off" and the monitor power cycled for the touchscreen to work correctly.

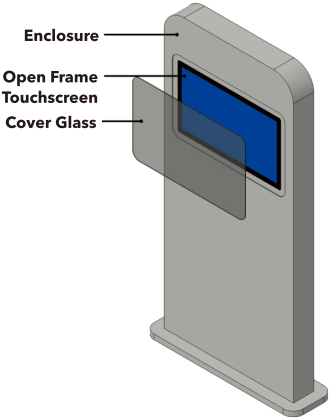

Problem	Troubleshooting
Monitor display is dim	- Use the OSD to increase the brightness &/or contrast. - 95 Series: Also check if Thermal Protection Mode is active (there is a "Exclamation" mark on the Top Left corner of OSD main menu). See user guide for details.
Monitor display is blank	- If the Power Status LED is blinking, the monitor or Computer Module maybe in Sleep mode. Press any key / move the mouse / touch the touchscreen to see if the image reappears. - Check that there are no loose cable connections.
Monitor image looks strange or is displaying an "Out of Range" message	- Adjust your computer's resolution/timing mode to be within the allowable timing ranges specified for your touchscreen display. - Use the Auto Adjust function in the OSD.
Touch functionality doesn't work	- Verify your PC has the latest Elo drivers installed. - Perform the calibration routine provided with the Elo drivers. - If the OSD buttons or power button does not respond, check to see if the OSD lock or power lock functions is on.
Can't wake on touch	- Check to see if the OSD Touch on Sleep function is disabled.
Only supports two touches at a time	- Check to see if the OSD Touch Thru function is on.